

Winona Concrete & Pipe Products Ltd.


489 Main Street West, Grimsby, Ontario L3M 1T4
 Ph. 905-945-8515 Email: info@winonaconcrete.com Fax. 905-945-1149

Concrete Catch Basins - 24"

Date : June 1, 2006

Model : **CB-243338, CB-243360**



Drawings are dimensional (not necessarily to scale) with unit of measure in INCHES unless otherwise noted.

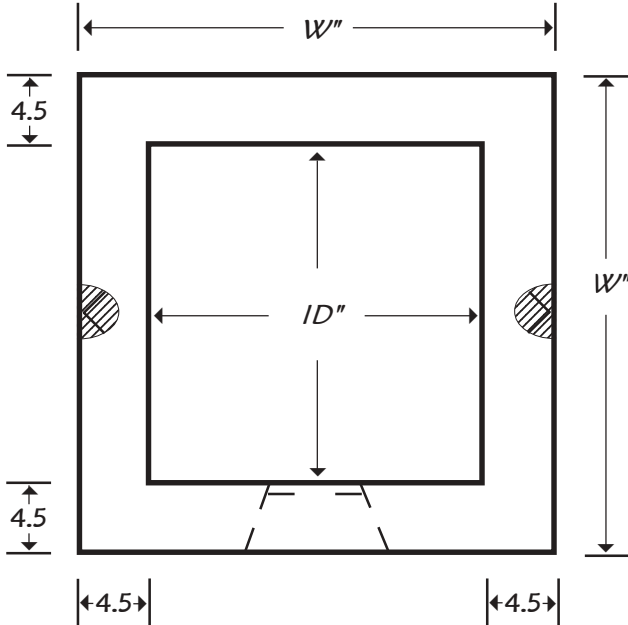

Dimensions & Weights

	CB-243338	CB-243360
H	38	60
W	33	33
ID	24	24
C	5	N/A
D	33	N/A
Wt.	1970 lbs.	3,050 lbs.

2", 3" & 4" high Grade Rings (square)
 available as required

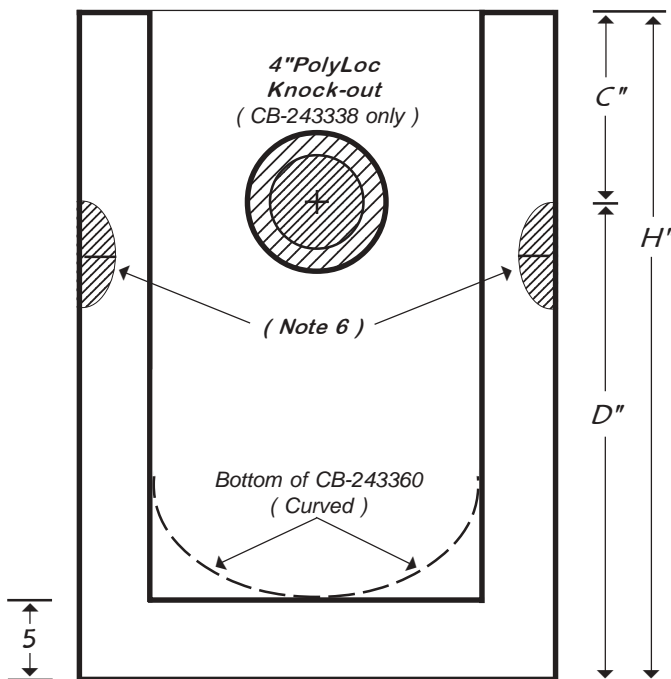

Product Information ...

- 1a) Cement is Portland Type 10 &/or 30 unless noted otherwise
- 2) Min. 28-day Concrete Strength is 32 MPA
- 3) Steel Reinforcing : - 4x4 6/6 WW mesh
- 4) CB-243360 is blank (has no knock-outs)
 Inside bottom floor is rounded (shown with dashed line)
- 5) CB-243338 has one 4" plastic PolyLoc Knock-Out. Floor of basin is flat.
- 6) Liftings Lugs (2) A-LOK Model 4CA14
- 7) Frame & Grate, Mastic Sealant, Steps & Grade Rings supplied as required.
- 8) Std Frame & Grate CB-FG24-BYC (455 lbs.)
 is OPSD 400.02 w / flat herring-bone bicycle-proof grate. Others available upon request.
- 9) All side walls 4.5" thick