

Winona Concrete & Pipe Products Ltd.

489 Main Street West, Grimsby, Ontario L3M 1T4
 Ph. 905-945-8515 Email: info@winonaconcrete.com Fax. 905-945-1149





Concrete Manhole / Well Tile

Date : June 1, 2006

Model : MT

Inside Dia. : 42"

Drawings are dimensional (not necessarily to scale) with unit of measure in inches unless noted otherwise.

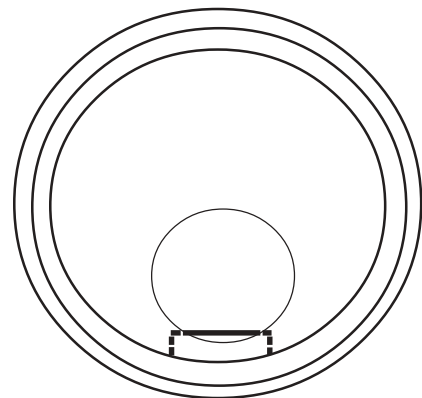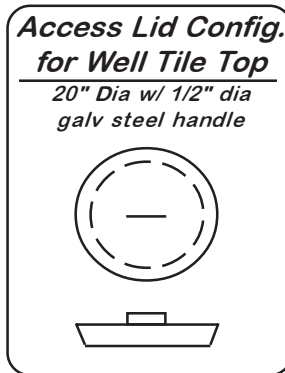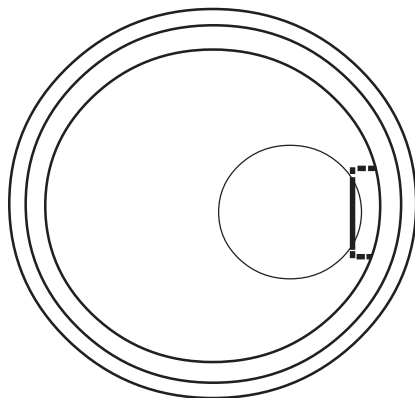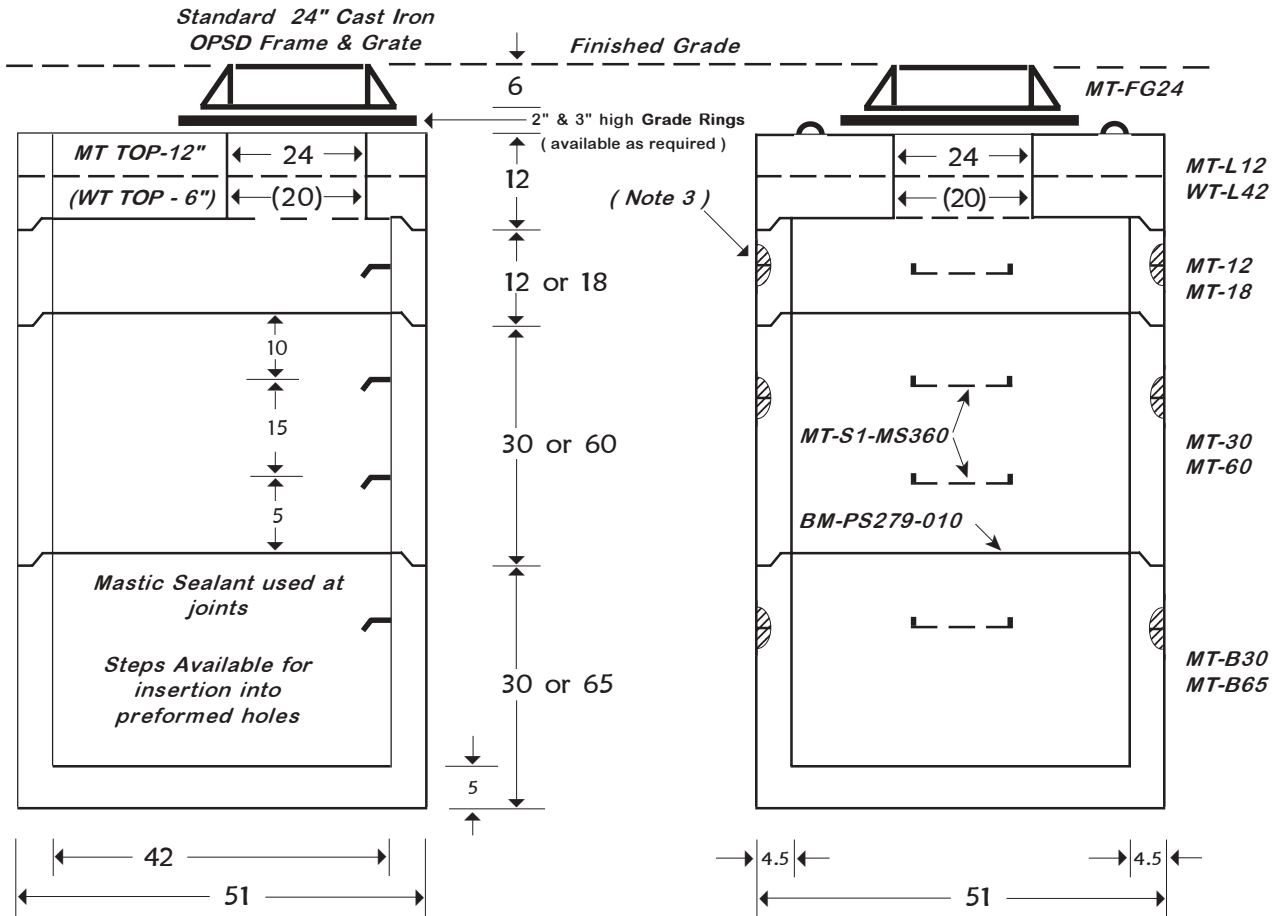

Product Information ...

- 1) Min 28-day Concrete Strength is 32 MPA
- 2) Steel Reinforcing as follows:
 Bottom & Top 10 mm
 Side Wall 6x6 9/9 WW mesh
- 3) Lifting Lugs (2 per section)
 A-Lok Model #4CA14
- 4) Frame & Grate, Mastic Sealant, Steps & Grade Rings supplied as required.

Product Nomenclature & Weights

MT-60	60" high Open Section	3,685 lbs.
MT-30	30" high Open Section	1,845 lbs.
MT-18	18" high Open Section	1,105 lbs.
MT-12	12" high Open Section	735 lbs.
MT-B30	30" high Base Section	2,380 lbs.
MT-B65	65" high Base Section	4,250 lbs.
MT-L12	12" high Manhole Top	1,165 lbs.
WT-L42	6" high Well Tile Top	835 lbs.
MT-FG24	Std. OPSD 401.01 Frame w/Solid Grate (420 lbs.)	
MT-S1-MS360	16" wide MSU Poly Coated Alum Step	
BM-PS279-010	Press Seal Mastic Sealant #279-1"	